

CertainTeed Solar

APOLLO[®] TILE II – 73x SOLAR ROOFING SYSTEM



See reverse for
product specifications



A high-efficiency solar tile designed for integration with most tile roofs.

Features and Benefits

- **Functional:** The Apollo Tile II system functions as both a roof and a solar array
- **Beautiful:** An earth-toned custom frame combined with a profile that matches flat concrete tiles provides a clean, integrated aesthetic
- **Efficient:** Modules use 14 high-efficiency mono PERC solar cells
- **Strong:** Mechanical load rating of 250 lbs per square foot
- **Lightweight:** Weighs significantly less than a tile roof eliminating the need for structural review or reinforcement
- **Wind Resistant:** Florida Building Code High Velocity Hurricane Zone rated (Vult 194mph)
- **Water Shedding:** Built-in water management features
- **Easy to Install:** Open space under the modules and built-in wire clips allow for easy wire management and installation
- **Aesthetic:** Brown (frame); black (cells) on black (backsheet) provides a greater aesthetic and visually blends with most concrete tile colors



Each System Includes

- 73 watt, high-efficiency monocrystalline modules
- Waterproof and fire-resistant underlayment
- Flashing accessories
- Starter strip and wind clips
- Home run wiring
- String inverter (Optional)
- Monitoring system (optional)




MADE IN USA

using foreign and domestic components

CertainTeed
SAINT-GOBAIN

Dimensions

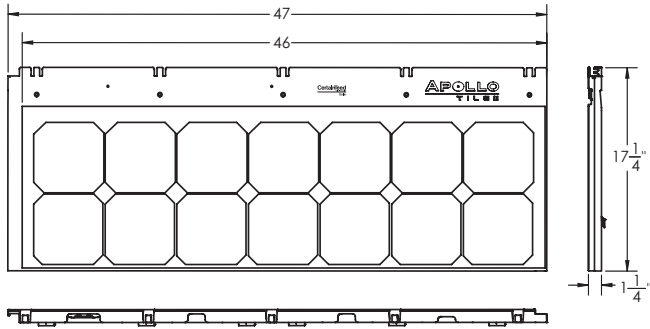

Electrical Characteristics

Standard Test Conditions: 25 C, 1kW/m², AM 1.5

Maximum Power (Pmax)	73W
Maximum Power Voltage (Vmp)	7.94 V
Maximum Power Current (Imp)	9.19 A
Open Circuit Voltage (Voc)	9.77 V
Short Circuit Current (Isc)	9.53 A
Maximum System Voltage	600 V
Series Fuse Rating	15 A
Performance Tolerance	+/- 3%
Conversion Efficiency	17.8%
Power Temp. Coefficient (Ptmp)	-0.37%/°C
Voltage Temp. Coefficient (Vtoc)	-0.27%/°C
Normal Operating Cell Temp. (NOCT)	57.0°C
PTC Rating	63.7W

Absolute Maximum Ratings

Parameters	Rating	Unit
Operating Temperature	-40 to +90	°C
Storage Temperature	-40 to +90	°C
Dielectric Voltage Withstood	600 Max	V-DC

Mechanical Characteristics

Exposed Area	46" x 13.25"
Weight	13 lbs (3.1 lbs per sq ft)
Cell	Monocrystalline
No. of cells and connections	14 in series
Bypass Diode	1 per panel
Load Rating	250 lbs/sq ft
Wiring	12 AWG PV wire
Connectors	Staubli MC4

Warranty and Certifications

Warranty* 25 year limited power warranty
10 year 110 mph limited wind warranty

Certifications (Pending) UL 1703
UL 790 Class A & C Fire
ASTM D3161 Class F
California CEC
High Velocity Hurricane Zone
FBC HVHZ FL17670-R3 (194 mph Vult wind rating)



*See CertainTeed's limited warranty for details



CertainTeed

CEILINGS • DECKING • FENCE • GYPSUM • INSULATION • RAILING • ROOFING • SIDING • TRIM
20 Moores Road, Malvern, PA 19355 800-233-8990 certainteed.com